



artos EP1/EP2 end post



EP1/EP2 end post


The eye-catching profile of the artos end post has an excellent stability and ground seating, due to its large surface area in contact with the soil.

With different material thicknesses available, we can offer a personalised solution to each and every request. Years of experience working with harvesting machines confirms the stability of this end post.

The key to the success of this posts is due to the 8 or 10 rounded metal bars that are welded into the post (custom shape). They ensure that the post has an excellent seating in the spoil, as well as a strong resistance to twisting.

The rounded metal bars also enable you to attach wire to the end post. They can be used for chains to fix the wire to the post, or other accessories such as tension springs to secure your foliage wires. At the base of the post the metal bars are welded inclined to help fix the post into the ground, as well as being used as a stopper when a ground base plate is used.

The welded bars on the artos EP2 do not surpass the width of the metal profile of the post.

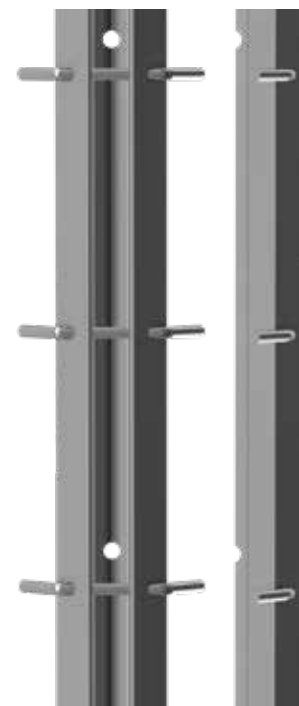

EP1



EP2



EP2



Delivery Program

Material thickness / Weight per metre	Hot Dipped Galvanised 1,60 mm/1,98 kg 1,90 mm/2,34 kg 2,10 mm/2,58 kg
Standard lengths	2300 - 2700 mm
Coil width	143 mm
Coating	Hot Dipped Galvanised (HDG), Zinc Magnesium (ZM)

Other lengths available on request

- Weathering Steel not available on this post


Recommended installation depth

Post length (mm)	Recommended installation depth (mm)
2300 - 2500	900
2600 - 2700	950

Both the EP1 and the EP2 have holes in the rear of the post so as to connect the anchor wire to the end post.





EP1/EP2 Line

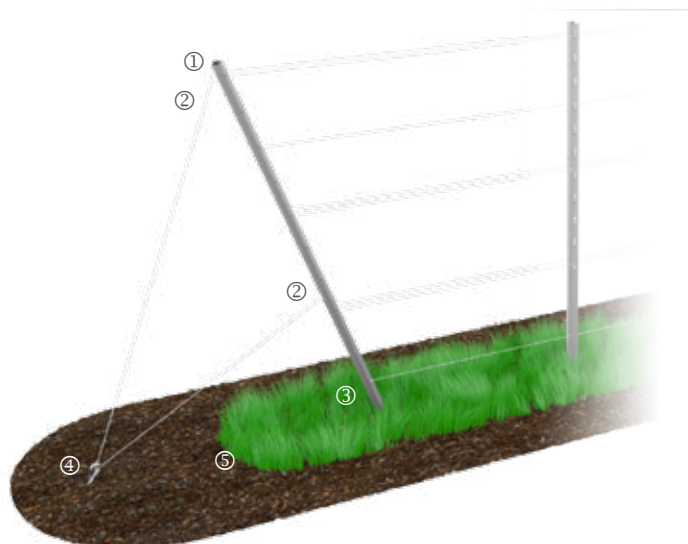

- ① Install the end post 20cm deeper than the intermediate post
- ② Double bracing for end post anchor point
- ③ 60° incline for end post
- ④ Install the anchor in line with the double bracing
- ⑤ Distance between anchor point and end post between 1,0m -1,5 m

Dimension artos EP1/EP2 end post

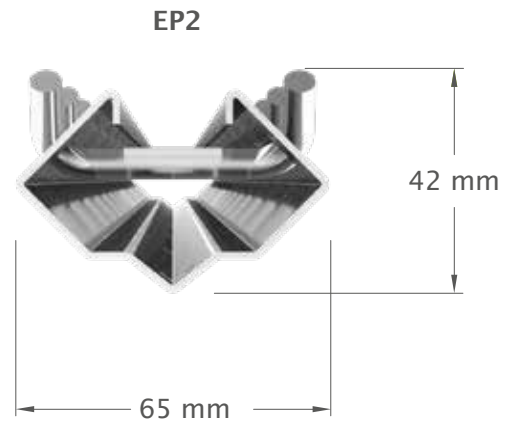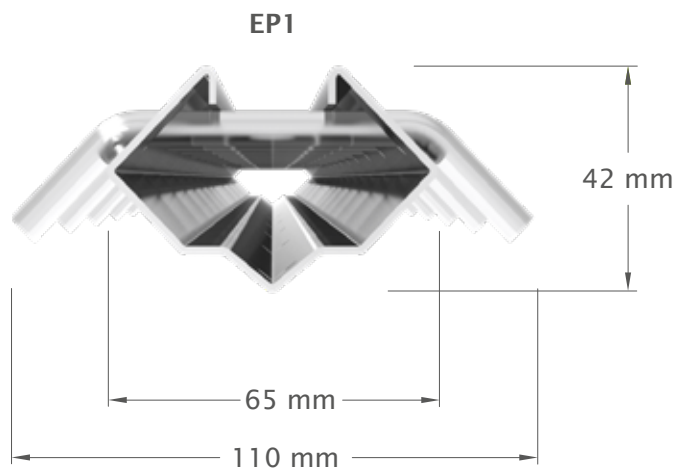

Local retailer:

Sales and informations:



Vertriebsgesellschaft KG
Vor dem Schloss 27 | D-55234 Bechtolsheim

Tel +49 6733 / 9499227

E-Mail: info@artos-meiser.com
www.artos-meiser.com

Production:



Meiser Vogtland GmbH & Co. KG
Am Lehmteich 3 | D-08606 Oelsnitz

Tel +49 37421 / 50 2303 | Fax +49 37421 / 50 2310

E-Mail: info@meiser.de
www.meiser.de