



artos EP75 end post



EP75 end post

The EP75 end post has been specially designed for a more dynamic vineyard trellis system and for higher load applications.

The holes along the length and the rear of the post itself allows the user to attach the fixed wires as well fixing chains or the dynamic roller spring system.

This modular post enables you to integrate your tensioning accessories into the post itself to optimise your trellis system.

The EP75 can also be used for orchard trellising.



Recommended installation depth

Post length (mm)	Recommended installation depth (mm)
2500	900
2600 - 3000	950




Delivery program

Material thickness / Weight per metre	Hot Dipped Galvanised	Strip Galvanised	Weathering Steel
	2,00 mm/3,17 kg	1,80 mm/3,00 kg	1,80 mm/3,00 kg
	2,20 mm/3,52 kg	2,00 mm/3,33 kg	2,00 mm/3,33 kg
	2,70 mm/4,42 kg	2,50 mm/4,16 kg	2,50 mm/4,16 kg
Standard lengths	2500 - 3000 mm		
Coil width	212 mm		
Coating	Hot Dipped Galvanised (HDG), Strip Galvanised (SG), Zinc Magnesium (ZM), Weathering Steel (C-Type)		


Other lengths available on request

EP75 - Fixed wire installation

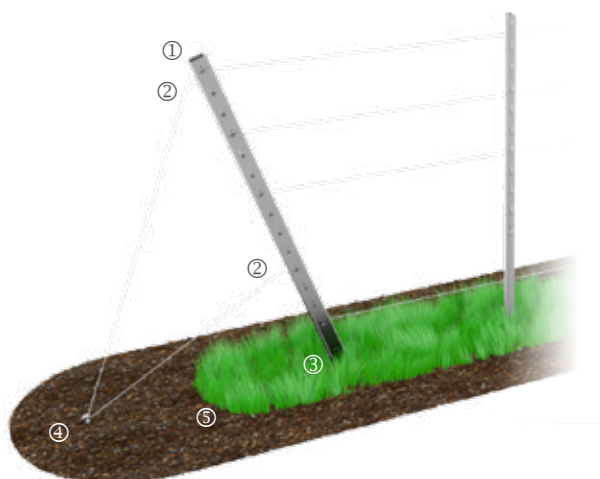

- ① Install the end post 20 cm deeper than the intermediate post
- ② Use a double tie back to connect the end post to the anchor
- ③ Incline the end post at 60°
- ④ Install anchor in line with the fixed wire
- ⑤ Distance between anchor point and end post 1,0m-1,5 m

EP75 - Dynamic wire installation

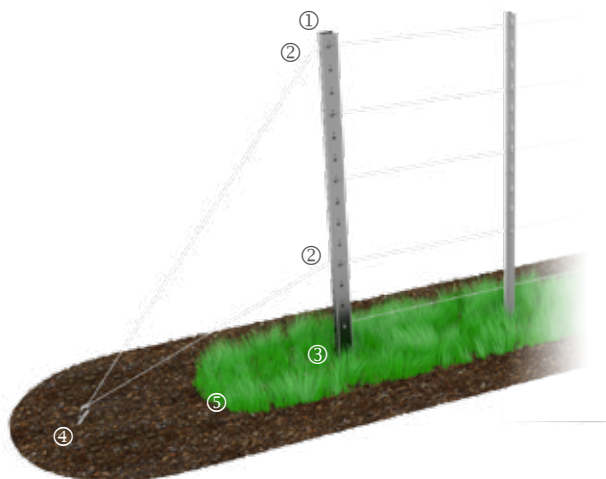


- ① Install the end post 20 cm deeper than the intermediate post
- ② Use a double tie back to connect the end post to the anchor
- ③ Incline the end post at 90°
- ④ Install anchor in line with fixed wire
- ⑤ Distance between anchor point and end post 1,0m-1,5 m



Dimension artos EP75 end post

EP75

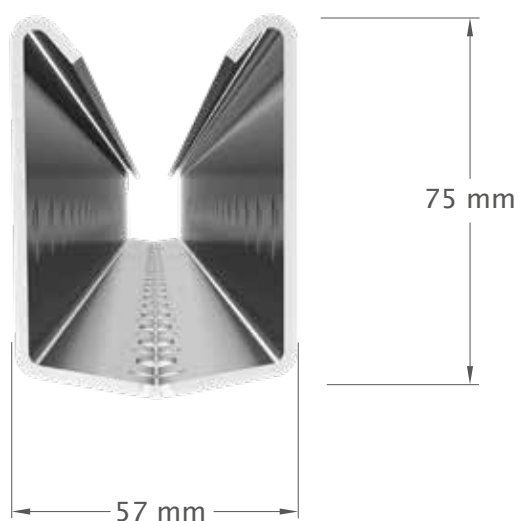

You can also use the EP75 with various accessories
More information: www.artos-meiser.com

Local retailer:

Sales and informations:



Vertriebsgesellschaft KG
Vor dem Schloss 27 | D-55234 Bechtolsheim

Tel +49 6733 / 9499227

E-Mail: info@artos-meiser.com
www.artos-meiser.com

Production:



Meiser Vogtland GmbH & Co. KG
Am Lehmteich 3 | D-08606 Oelsnitz

Tel +49 37421 / 50 2303 | Fax +49 37421 / 50 2310

E-Mail: info@meiser.de
www.meiser.de