



artos C post



artos C40/C50/C60

The special feature of the artos C posts are its external hooks, which are made at an angle and then aligned afterwards. This means that the hooks cannot be pushed into the punched hole, even by machinery use in the vineyard. An additional indent on the hook ensures stability and strength for the hook itself.

Due to its shape, the artos C post is perfectly suited to mechanical work in the vineyard.

To provide a solution for all requirements, we can offer you this post in 3 different sizes and thicknesses.

Other applications for this post include fruit trellising and fencing applications.



C-Post hooks



C-Post hook



C Post double hook



Delivery Program

Material thickness/ weight per meter		Hot Dipped Galvanised	Strip Galvanised	Weathering Steel
	C40	1,60 mm/1,43 kg	1,50 mm/1,34 kg	1,80 mm/1,61 kg
		1,90 mm/1,72 kg	1,80 mm/1,61 kg	2,00 mm/1,79 kg
		2,10 mm/1,91 kg	2,00 mm/1,79 kg	
	C50	1,60 mm/1,56 kg	1,50 mm/1,46 kg	1,80 mm/1,75 kg
		1,90 mm/1,87 kg	1,80 mm/1,75 kg	2,00 mm/1,95 kg
		2,10 mm/2,08 kg	2,00 mm/1,95 kg	
	C60	1,60 mm/1,70 kg	1,50 mm/1,59 kg	1,80 mm/1,91 kg
		1,90 mm/2,04 kg	1,80 mm/1,91 kg	2,00 mm/2,12 kg
		2,10 mm/2,27 kg	2,00 mm/2,12 kg	
Standard lengths	C40	1800 - 2300 mm		
	C50	2000 - 2700 mm		
	C60	2300 - 2700 mm		
Coil width	C40	114 mm		
	C50	124 mm		
	C60	135 mm		
Coating		Hot Dipped Galvanised (HDG), Strip Galvanised (SG), Zinc Magnesium (ZM), Weathering Steel (C-Type)		
Hook type		External, spaced at 70 mm and 100 mm		

Other lengths available on request

Recommended installation depth

Post length (mm)	Recommended installation depth (mm)
1800 - 2000	550 - 600
2100 - 2300	600 - 650
2400 - 2500	650 - 700
2600 - 2700	750 - 800


The C post is available in three sizes (C40/C50/C60) and three material thicknesses (1,5mm /1,8mm /2,00mm). The profile of the post ensures an excellent stability in the grounds.

Post dimensions:

- C40 - 40 mm width for lower trellises
- C50 - 50 mm width for various trellis heights
- C60 - 60 mm width for high loads and ensure high stability



Dimension artos C-Post

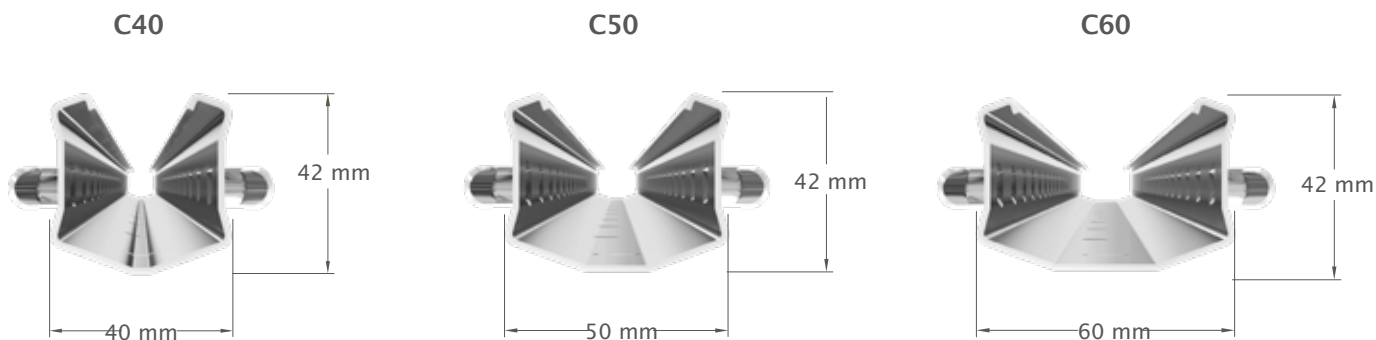

Local retailer:

Sales and informations:



Vertriebsgesellschaft KG
Vor dem Schloss 27 | D-55234 Bechtolsheim

Tel +49 6733 / 9499227

E-Mail: info@artos-meiser.com
www.artos-meiser.com

Production:



Meiser Vogtland GmbH & Co. KG
Am Lehmteich 3 | D-08606 Oelsnitz

Tel +49 37421 / 50 2303 | Fax +49 37421 / 50 2310

E-Mail: info@meiser.de
www.meiser.de