



artos E post




The special shape of this post gives it good ground seating and a good resistance to wind impact on the trellis.


To be able to offer solutions for all types of trellis requirements the artos E post is available with three different types of internal hooks options and in four material thicknesses.

Due to its exceptional profile, the internal hooks are granted a great strength and are very robust.

Depending on the configuration, the internal hooks can be used with a maximum wire diameter of 2,2mm.

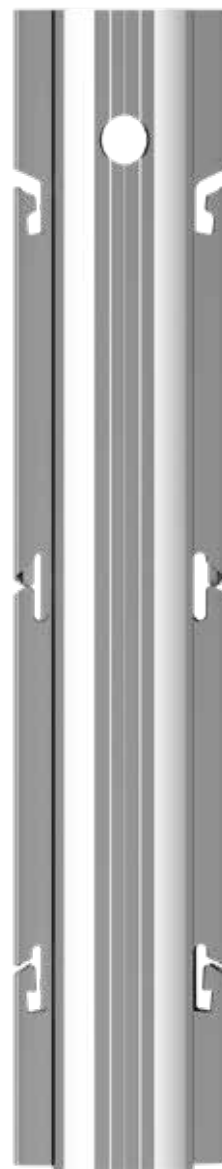


E post hook

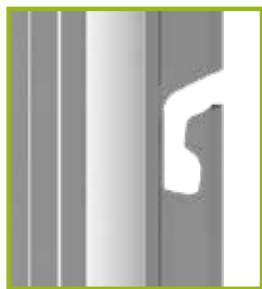

Open internal hook



Inclined internal hook

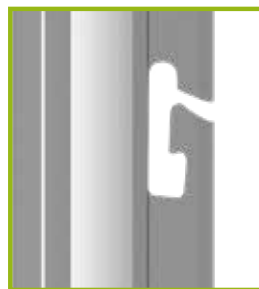

Straight internal hook



Delivery program

Material thickness/ Weight per metre	Hot Dipped Galvanised		Strip Galvanised	
	E55	1,60 mm/1,52 kg	E55	1,50 mm/1,41 kg
	E60	1,60 mm/1,58 kg	E60	1,50 mm/1,47 kg

Standardlengths	E55	2300 - 2700 mm
	E60	2300 - 2700 mm

Coil width	E55	124 mm
	E60	128 mm

Coating	Hot Dipped Galvanised (HDG), Strip Galvanised (SG), Zinc Magnesium (ZM)
---------	---

Hook type	Internal hooks spaced at 100 mm
-----------	---------------------------------


Other lengths available upon request

Recommended installation depth


Post length (mm)	Recommended installation depth (mm)
1800 - 2300	600
2400	650
2500	700
2600 - 2700	750 - 800

Post dimensions:

- E55 - 55 mm width, high stability, used for all terrain types
- E60 - 60 mm width, high load trellises

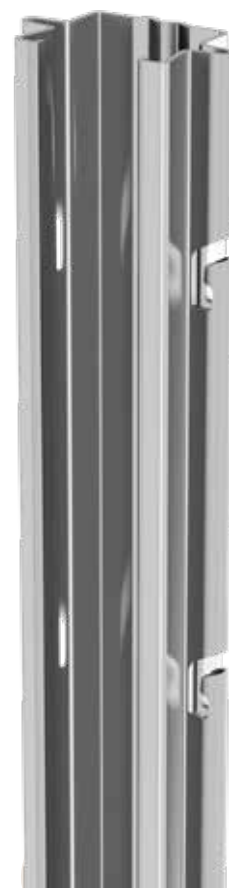

Dimension artos E-post

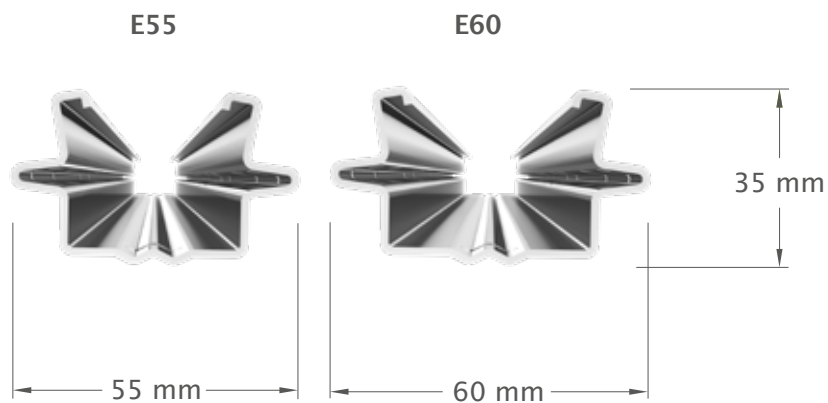

Local retailer:

Sales and informations:



Vertriebsgesellschaft KG
Vor dem Schloss 27 | D-55234 Bechtolsheim

Tel +49 6733 / 9499227

E-Mail: info@artos-meiser.com
www.artos-meiser.com

Production:



Meiser Vogtland GmbH & Co. KG
Am Lehmteich 3 | D-08606 Oelsnitz

Tel +49 37421 / 50 2303 | Fax +49 37421 / 50 2310

E-Mail: info@meiser.de
www.meiser.de